


KEY FEATURES

Low VSWR across full band

Sealed up to 15 psig

Bespoke load

Typical parameters for this unit are shown below, but other design flange types and heatsink fins can be accommodated on request

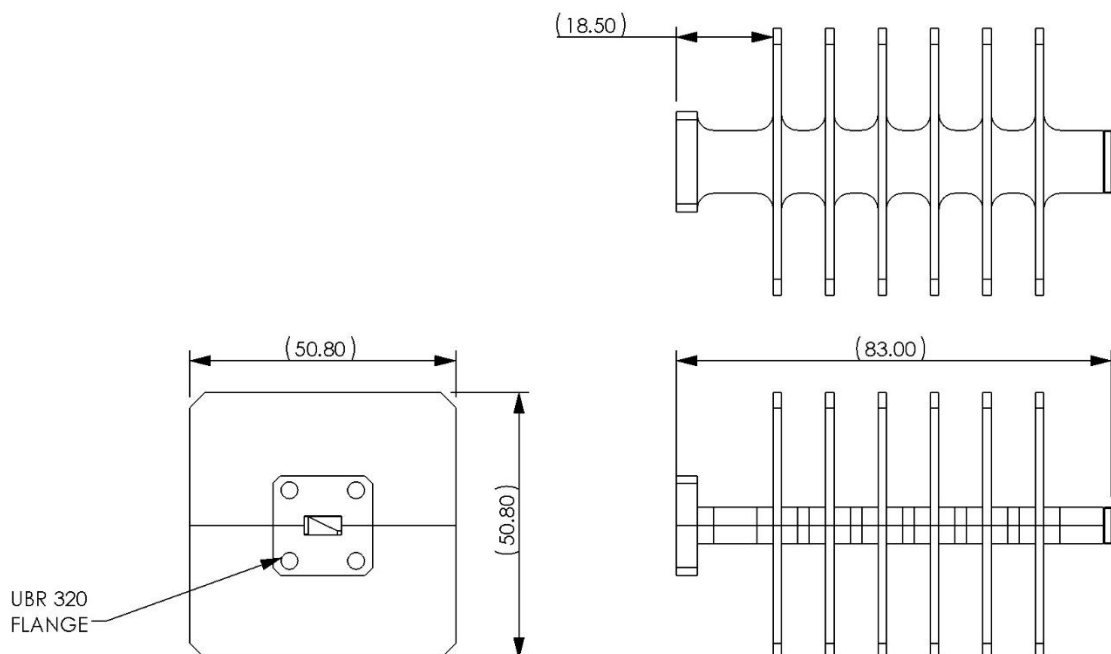

Key Specification

Model	006155
Passband	26.5-40.0 GHz
Passband Return Loss	>20dB
Power CW	100 W

Environmental

Max Temp at Full Power	130 Deg. C
Pressurisation	15 PSI (Sealed)
Inside Finish	MIL-DTL-5541 Class 3 Aluminium Chromate

Mechanical

Housing	Aluminium
Flange	UBR 320
Weight	<82 g
RoHs	Compliant
Length	83 +/-0.5 mm

Note: All information is correct at date of issue. Specifications are subject to change without notice
Issued: 16/07/20
Revision: 01